

INSTALLATION GUIDE

Setmark® Strap-Around Pipe Markers Installation Instructions

Size codes 12LG, 24 and 32, for pipes with an outside diameter of 6" and over

STEP 1

Obtain Materials:


- (1) Setmark
- (2) Straps/ Zip Ties



STEP 2

Feed Through Strapping/ Zip Tie:

Take the flush/smooth side of the strapping/zip tie and feed it underneath the setmark. Complete for both sets of slot holes.

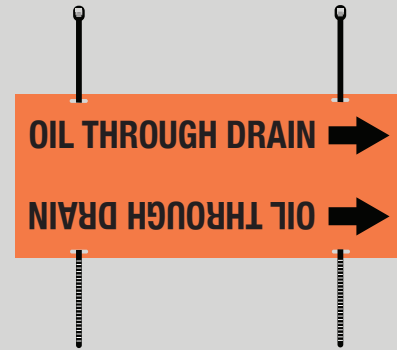

STEP 3

Strap Setmark around Pipe:

Once the straps are fed through you can line up the Setmark to the pipe and begin to fasten the straps/zip ties around the pipe until the Setmark is securely fastened. Trim off excess strapping once tightened.

